

Max. Flow Rate: 79 GPH (300 LPH)

- Separ 2000 series water separators fuel filters are a simple solution to many different fuel related problems.
- Five separate stages of filtration ensure 99.9% water separation (Certified TUV Report using SAE J1839) at maximum flow.
- Low restriction reduces wear on fuel pumps and ensures full RPMs.
- Backflushable (cleanable) element reduces down time and costly element changes.
- Marine version with U.S. Coast Guard-accepted metal heat deflector.

INDUSTRIAL



MARINE



Shown: Industrial (left to right) 2000/5/50, 2000/5/50U
Marine (left to right) 2000/5/50D, 2000/5/50UD-G

Inlet / Outlet Connections

Single Unit: 3/4"-16 Straight o-ring SAE
Duplex Unit: Shipped with #8 Male JIC Flare
(other adapters available)
Inlet and Outlet Pipe connection 12mm.


Ordering Specifications

SWK-2000/5/50 U M MK K KD D A - G


Duplex _____
Metal bowl _____
Metal bowl w/ contacts _____
Clear bowl w/ water contacts _____
Clear bowl w/ metal heat deflector _____
and water contacts _____
Clear bowl w/ metal heat deflector _____
Automatic switchable duplex _____
(See page 18 for details)
Gauge _____

We reserve the right to alter the specification without prior notice.


Pressure Drop

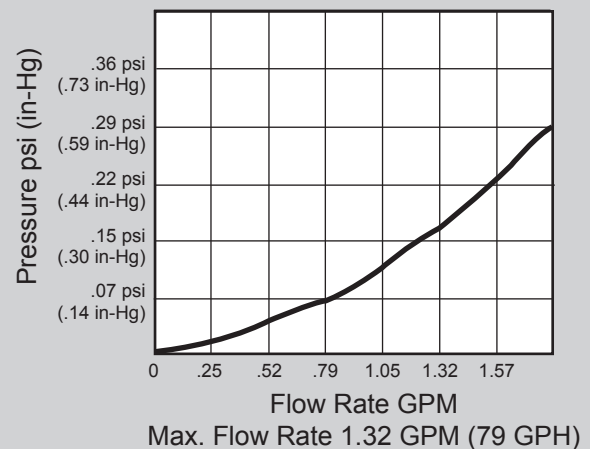

INDUSTRIAL

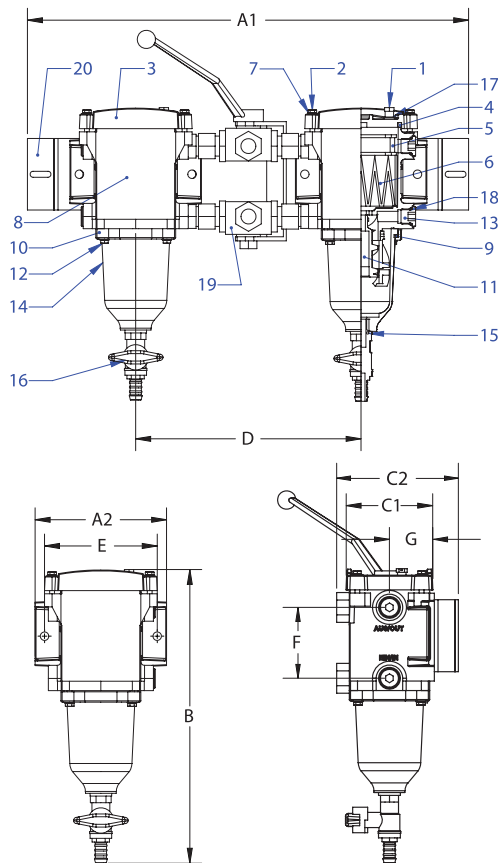

MARINE

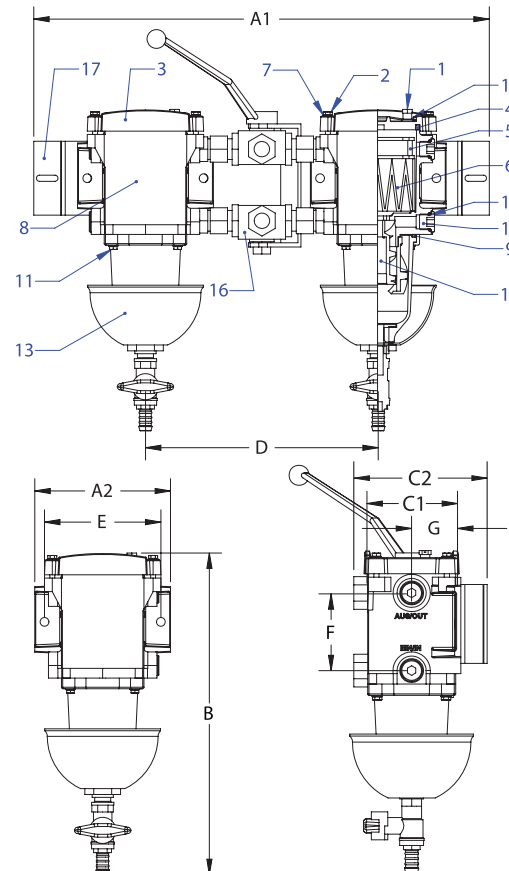

Item	Part #	Description	Dimension		Item	Part #	Description	Dimension	
1	30408	Bleed Screw	A1	18.5"	1	30408	Bleed Screw	A1	18.5"
2	FAB51821	Lid Screw		(469.9mm)	2	FAB-51821	Lid Screw		(469.9mm)
3	30542	Lid	A2	5.51"	3	30542	Lid	A2	5.51"
4	10367	Lid Gasket		(140mm)	4	10367	Lid Gasket		(140mm)
5	30295	Spring Frame	B	12.31"	5	30295	Spring Frame	B	12.31"
6	00510/50 00530/50 00560/50S	Filter Element		(312.8mm)	6	00510/50 00530/50 00560/50S	Filter Element		(312.8mm)
		10 Micron	C1	3.68"			10 Micron	C1	3.68"
		30 Micron (standard)		(93.5mm)			30 Micron (standard)		(93.5mm)
		60 Micron (stainless steel)	C2	5.07"			60 Micron (stainless steel)	C2	4.72"
7	30447	Washer		(128.8mm)	7	30447	Washer		(120mm)
8	30380	Housing	D	9.45"	8	30380	Housing	D	9.45"
9	10366	Bowl Gasket		(240.14mm)	9	10366	Bowl Gasket		(240.14mm)
10	30564	Retainer Ring	E	4.72"	10	30548	Centrifuge	E	4.72"
11	30548	Centrifuge		(120mm)	11	30561	Bowl Screw		(120mm)
12	30561	Bowl Screw	F	2.95"	12	6408-08	Plug	F	2.95"
13	6408-08	Plug		(75mm)	13	30988W 30988	Bowl Assembly	G	1.87"
14	30984	Clear Bowl	G	1.87"			Single unit (white)		(47.5mm)
15	10360	Drain Valve O-Ring		(47.5mm)			Duplex unit (grey)		
16	30366	Drain Valve	Model Weight		14	30558	Bleed Screw Gasket	Model Weight	
17	30558	Bleed Screw Gasket	SWK-2000/5/50	3.5 lbs	15	6408-08	Plug O-Ring	SWK-2000/5/50D	4.5 lbs
18	6408-08	Plug O-Ring		(1.59 kg)	16	30474	Reversing Valve Assembly		(2.04 kg)
19	30474	Reversing Valve Assembly	SWK-2000/5/50U	12 lbs	17	30476	Mounting Bracket	SWK-2000/5/50UD	13.5 lbs
20	30476	Mounting Bracket		(5.44 kg)					(6.12 kg)